

# FLOWMARK

## COOLING TOWER AOP WATER TREATMENT

### FLOWMARK MODEL DS-2

Treats Towers Up To 500 Tons



Replaceable Lamp Life = 1 Year (9,000 hrs.)


#### **FlowMark Technology Overview**

The FlowMark Water Treatment Disinfection System is classified as an Advanced Oxidation Process. Oxygen is split into singlet oxygen atoms as it passes through a lamp chamber containing a specific wavelength UV lamp. The oxidizing gas is introduced to the cooling tower water via Diffusers or Venturi injection. The singlet oxygen atoms interact with water molecules forming hydroxyl and oxygen radicals which trigger various chemical reactions, oxidizing contaminants including minerals and bacteria. In addition, some oxygen radicals join with water molecules (H<sub>2</sub>O) to form a measureable residual of Hydrogen Peroxide (H<sub>2</sub>O<sub>2</sub>), a trusted long lasting, nontoxic biocide.



### Advanced Oxidation Process

- Produces Highly Reactive Hydroxyl Radicals
- Low ozone (O<sub>3</sub>) production (<0.5 PPM)
- Creates Measureable Hydrogen Peroxide
- Controls Bacteria and Bio-film
- No Plumbing to Install

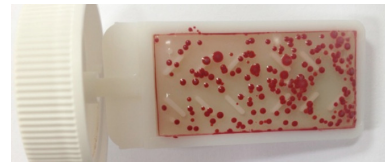

Before FlowMark Bacteria Count = 100,000 CFU/ml



2 Weeks After FlowMark Bacteria Count = 500 CFU/ml



75 Bernar Park, Suite #5, Rochester, New York, 14642

Telephone:(585) 232-1210

Toll Free: (888) 678-9473

mbromley@waterwiseofamerica.com

www.waterwiseofamerica.com